

EFFICIENT SMART SAFE



R-Flex 40ft

Reefer Flexitank

Filling Instructions Manual

Rev01 - 221012

LiquA

**EFFICIENT
SMART
SAFE**

| Ready for Filling



EFFICIENT
SMART
SAFE

I Coupling





Our standard valve is 3" male camlock.

You will need to have a **3" female cam-lock** coupling. (DIN EN 14 420-7)

Upon request 2" reductor is available.

Coupling

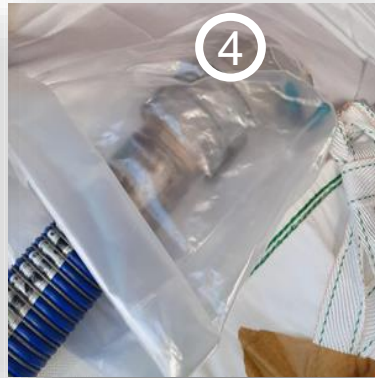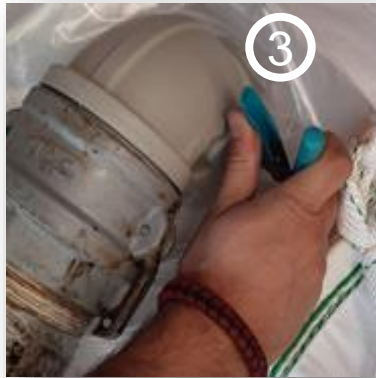

1. Remove the dust cap.
2. Couple the hose.
3. Open the valve
4. Unroll the bonnet/plastic cover.

Coupling

Lock the valve from the camlock handles with a cable tie for a safer valve connection.



Filling

- Start loading the R-Flex.
- **WARNING:** Ensure that the start up pumping speed does not exceed 300 lt/min until the R-Flex rises to an approximate height of 30cm (roughly the first 2-3,000 liters) , then increase the speed up to 600lt/min. Please ensure that the filling stations follow this instruction carefully.
- Do not turn on cooling until there is 12,000 liters in the flexitank
- Ideal filling time is 60 minutes.



Filling

- Ensure that you have chosen a light weight filling hose.
- Couple the hose to the valve.
- Make sure that protective plastic cover `bonnet` is unrolled. It will avoid possible contamination due to spillage while decoupling.



Supporting the Hose

- Our valve is not static and goes up during loading. Therefore, if the filling hose is supported with a tripod or similar, ensure that the support point is being changed periodically during the entire filling.



- If no hose support is being used, ensure that the hose does not exert any pressure to the valve. Ideal standing is shown at the picture.

Filling



After Loading;

1. Close the valve.
2. Remove the hose.
3. Fasten the dust cap

| Bonnet Closure

R-Flex has two protective bonnets around the inlet to prevent contamination and to act as secondary containment in case of an incident.

Ensure that Bonnet is well tied according to our following instructions.



Bonnet Closure



The Protective Bonnet has two individual layers of plastic film.

Both layers must be tied **separately**.

1. Push back the outer bonnet to expose the inner bonnet for easy operation.
2. Twist the full length of the inner bonnet. Ensure that minimum amount of air/space is left in the bonnet.
3. Make a tight knot, as close as possible to the valve.
4. Unroll the outer bonnet.
5. Twist the full length of the inner bonnet. Ensure that minimum amount of air/space is left in the bonnet.
6. Make a tight knot, as close as possible to the valve.

I FAQ

What happens if the R-Flex is loaded faster than the instructions?

If the cargo is filled in high speed, the layers of our R-Flex may not open easily, product may get trapped in between the layers and cause a puncture.

Ensure that the start up pumping speed does not exceed 300 lt/min until the R-Flex rises to an approximate height of 30cm (roughly the first 2-3,000 liters) , then increase the speed up to 600lt/min. Please ensure that the filling stations follow this instruction carefully.

How important is it to support heavy hose during the filling?

The filling hose must be supported very carefully. Support shall not create any torsion/stress over the valve. Our valve location is not static during the filling. Therefore, the support location should be changed when the hose starts to put stress on the valve.

I FAQ

What happens if I over load or under load the R-Flex than its nominated capacity?

Fill R-Flex within the tolerances stated at the datasheet and/or on the label.

Exceeding the upper limit may cause severe damage on R-Flex and flexitank may break with a total loss result.

If you under load the R-Flex less than the bottom limit, lack of cargo in the flexitank may cause severe surge in the flexitank during the transportation.

Ensure that the amount of cargo in the R-Flex is within the tolerances.

IMPORTANT: We deliver our flexitanks air tight. Ensure that you do not pump in air into the flexitank. The volume of air in the flexitank cannot be predicted; you might be overloading the flexitank unintentionally due to the volume of air.

**EFFICIENT
SMART
SAFE**

LiquA

THANK YOU

LiquA Europe
Calle Jose Aguirre 40, Piso 3 Valencia España
CP: 46011
+34 91 1238506
LiquA Fabrika
Atabey Cd. No 28 Kat 1 Çekmeköy 34794 İstanbul
Türkiye
+90 216 312 8660

www.liquatrans.com

| info@liquatrans.com